



Fact Sheet

US Army Corps of Engineers
U.S. Army Engineer Research and Development Center


July 2004

Public Affairs Office □ 3909 Halls Ferry Road □ Vicksburg, MS 39180-6199 □ (601) 634-2504 □ www.erd.usace.army.mil
CHL website chl.erd.usace.army.mil

Wave Climate and Wave Response Study, Kawaihae Harbor, Island of Hawaii

Purpose: To determine wave response of the existing deep-draft harbor and response of proposed harbor modifications and to evaluate implications for navigation and mooring areas.

Background: Kawaihae Harbor, located along the northwest coast of the Island of Hawaii, is one of two deep-draft ports serving the island. The harbor (see figure) accommodates commercial, military, and recreational users. In recent years, cargo volume handled at Kawaihae Harbor has expanded significantly in response to increasing population and development of West Hawaii. A 2650-ft long rubble-mound breakwater along an exposed coral reef protects the harbor from ocean waves. The harbor entrance is about 700 ft wide, facing northwest. Ocean wind waves and swell can attack the harbor complex from deep-water directions between southwest clockwise to west-northwest. Commercial piers are located along the northeast side of the harbor. Military facilities occupy the south corner of the harbor, and recreational vessels use the eastern end. Water depth is 40 ft in the Federal entrance channel and 35 ft in the harbor basin and commercial pier areas.

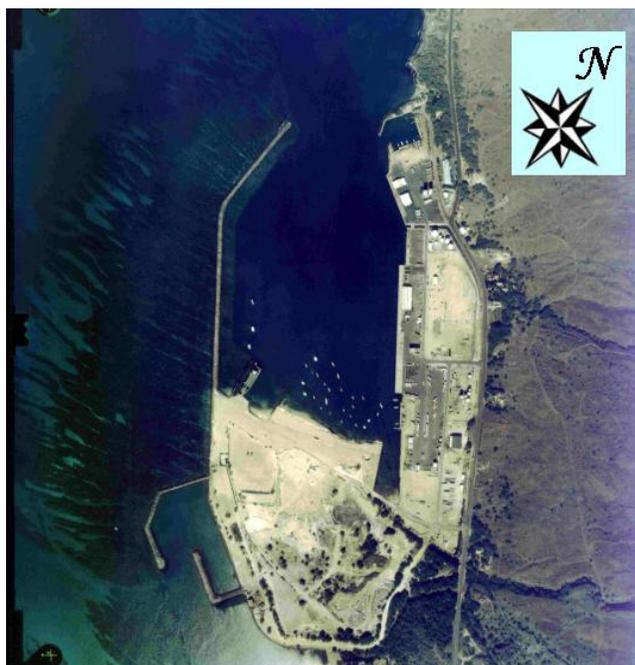

Facts: Because of Kawaihae Deep-Draft Harbor's present and projected commercial importance to the Island of Hawaii, the Harbors Division, Department of Transportation, State of Hawaii, has devoted special care to long-range planning. Needs to be addressed include increased cargo transportation and handling efficiency and reduced wave impacts in the harbor. The U.S. Army Engineer Research and Development Center, Coastal and Hydraulics Laboratory, is performing numerical (computer) model studies in support of long-term planning. The numerical model is being validated with field measurements for short waves (wind waves and swell) and long waves (harbor oscillations) collected during January to April 2004. The validated model is being used to evaluate the technical feasibility of six alternative modifications to the harbor. Model results will be compared to experience in the existing harbor and to general criteria for operational acceptability.

Points of Contact: For additional information, please contact
Dr. Edward F. Thompson at 601-634-2027 (edward.f.thompson@erd.usace.army.mil), or
Mr. Dennis Markle at 601-634-3460 (dennis.g.markle@erd.usace.army.mil).